


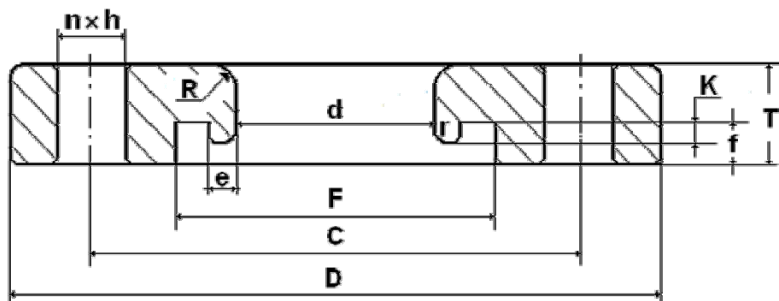

單位:MM

Standard 標準	Size 規格	KG/PC 單重	D 外徑	d 內徑	T 厚度	C 中心距	n 孔數	H 孔徑	F 槽外徑	e 壁厚	f 槽深	K 邊高	r	R
DIN PN16	1" — 25A	0.98	115	40	16	85	4	14	62	3	5.0	3.0	1.5	10
DIN PN16	1.1/4" — 32A	1.45	140	52	16	100	4	18	70	3	5.0	3.0	1.5	10
DIN PN16	1.1/2" — 40A	1.74	150	52	16	110	4	18	70	3	5.0	3.0	1.5	10
DIN PN16	2" — 50A	2.28	165	63	18	125	4	18	88	3	6.0	3.5	1.5	10
DIN PN16	2.1/2" — 65A	2.65	185	83	18	145	4	18	107	3	6.0	4.0	1.5	14
DIN PN16	3" — 80A	3.24	200	92	20	160	8	18	119	3	7.0	4.0	2	14
DIN PN16	4" — 100A	3.29	220	120	20	180	8	18	152	4	8.5	4.5	2	15
DIN PN16	5" — 125A	4.48	250	146	22	210	8	18	183	4	8.5	4.5	2	15
DIN PN16	6" — 150A	5.46	285	171	22	240	8	22	212	4	9.0	5.5	3	16
DIN PN16	8" — 200A	7.77	340	220	24	295	12	22	264	6	9.0	5.5	3	16
DIN PN16	10" — 250A	11.31	405	270	26	355	12	26	324	8	10.0	6.5	4	16
DIN PN16	12" — 300A	13.78	460	322	26	410	12	26	373	8	10.0	6.5	4	16
DIN PN16	14" — 350A	17.94	520	375	28	470	16	26	422	8	11.0	7.0	4	17
DIN PN16	16" — 400A	23.37	580	414	30	525	16	30	475	8	13.0	7.0	5	18
DIN PN16	18" — 450A	27.05	640	464	30	585	20	30	525	10	15.0	8.0	5	19
DIN PN16	20" — 500A	35.55	715	513	30	650	20	33	576	10	15.0	8.0	5	19
DIN PN16	24" — 600A	44.54	840	632	30	770	20	36	692	10	15.0	8.0	5	19
DIN PN16	28" — 700A	42.68	910	730	32	840	24	36	795	12	16.0	8.0	5	19
DIN PN16	14"B — 350A b	17.12	520	375	28	470	16	26	438	8	11.0	7.0	4	17
DIN PN16	16"B — 400A b	22.53	580	414	30	525	16	30	488	8	13.0	7.0	5	18
DIN PN16	18"B — 450A b	25.97	640	464	30	585	20	30	538	10	15.0	8.0	5	19
DIN PN16	20"B — 500A b	34.36	715	513	30	650	20	33	589	10	15.0	8.0	5	19

外 徑 (D) +1.0MM-0MM

孔 徑 (H) ±0.3MM

內 徑 (d) +0.5MM-0MM

旋 距: ±0.5MM

厚 度 (T) +1.0MM-0MM

同心度: ±0.3MM

中 心 距 (C) ±0.5MM

平行度: ±0.5MM



蚨鑫国际有限公司

FU XIN INTERNATIONAL CO., LIMITED

DIN PN16

畫 圖

製 表

審 核

Tyler Zhao

標 準

材 質

日 期

Rubber joint Flange

Carbon Steel: Q235B

04/Sep/2021