


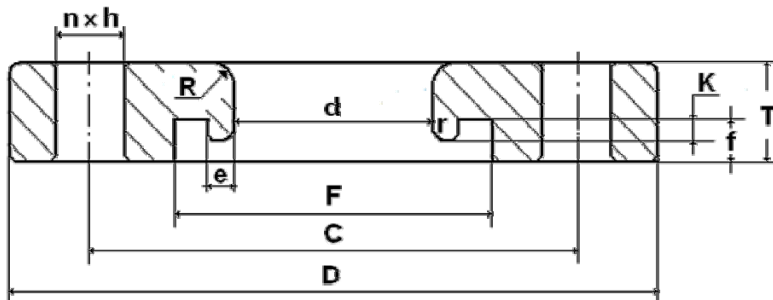

單位:MM

| Standard<br>標準 | Size<br>規格    | KG/PC<br>單重 | D<br>外徑 | d<br>內徑 | T<br>厚度 | C<br>中心距 | n<br>孔數 | H<br>孔徑 | F<br>槽外徑 | e<br>壁厚 | f<br>槽深 | K<br>邊高 | r   | R  |
|----------------|---------------|-------------|---------|---------|---------|----------|---------|---------|----------|---------|---------|---------|-----|----|
| EN1092 PN16    | 1" — 25A      | 0.98        | 115     | 40      | 16      | 85       | 4       | 14      | 62       | 3       | 5.0     | 3.0     | 1.5 | 10 |
| EN1092 PN16    | 1.1/4" — 32A  | 1.64        | 140     | 52      | 18      | 100      | 4       | 18      | 70       | 3       | 5.0     | 3.0     | 1.5 | 10 |
| EN1092 PN16    | 1.1/2" — 40A  | 1.96        | 150     | 52      | 18      | 110      | 4       | 18      | 70       | 3       | 5.0     | 3.0     | 1.5 | 10 |
| EN1092 PN16    | 2" — 50A      | 2.41        | 165     | 63      | 19      | 125      | 4       | 18      | 88       | 3       | 6.0     | 3.5     | 1.5 | 10 |
| EN1092 PN16    | 2.1/2" — 65A  | 2.97        | 185     | 83      | 20      | 145      | 4       | 18      | 107      | 3       | 6.0     | 4.0     | 1.5 | 14 |
| EN1092 PN16    | 3" — 80A      | 3.24        | 200     | 92      | 20      | 160      | 8       | 18      | 119      | 3       | 7.0     | 4.0     | 2.0 | 14 |
| EN1092 PN16    | 4" — 100A     | 3.70        | 220     | 120     | 22      | 180      | 8       | 18      | 152      | 4       | 8.5     | 4.5     | 2.0 | 15 |
| EN1092 PN16    | 5" — 125A     | 4.48        | 250     | 146     | 22      | 210      | 8       | 18      | 183      | 4       | 8.5     | 4.5     | 2.0 | 15 |
| EN1092 PN16    | 6" — 150A     | 6.09        | 285     | 171     | 24      | 240      | 8       | 22      | 212      | 4       | 9.0     | 5.5     | 3.0 | 16 |
| EN1092 PN16    | 8" — 200A     | 8.53        | 340     | 220     | 26      | 295      | 12      | 22      | 264      | 6       | 9.0     | 5.5     | 3.0 | 16 |
| EN1092 PN16    | 10" — 250A    | 12.84       | 405     | 270     | 29      | 355      | 12      | 26      | 324      | 8       | 10.0    | 6.5     | 4.0 | 16 |
| EN1092 PN16    | 12" — 300A    | 17.48       | 460     | 322     | 32      | 410      | 12      | 26      | 373      | 8       | 10.0    | 6.5     | 4.0 | 16 |
| EN1092 PN16    | 14"A — 350A   | 23.08       | 520     | 375     | 35      | 470      | 16      | 26      | 422      | 8       | 11.0    | 7.0     | 4.0 | 17 |
| EN1092 PN16    | 16"A — 400A   | 30.80       | 580     | 414     | 38      | 525      | 16      | 30      | 475      | 8       | 13.0    | 7.0     | 5.0 | 18 |
| EN1092 PN16    | 18"A — 450A   | 40.11       | 640     | 464     | 42      | 585      | 20      | 30      | 525      | 10      | 15.0    | 8.0     | 5.0 | 19 |
| EN1092 PN16    | 20"A — 500A   | 57.89       | 715     | 513     | 46      | 650      | 20      | 33      | 576      | 10      | 15.0    | 8.0     | 5.0 | 19 |
| EN1092 PN16    | 24" — 600A    | 82.58       | 840     | 632     | 52      | 770      | 20      | 36      | 692      | 10      | 15.0    | 8.0     | 5.0 | 19 |
| EN1092 PN16    | 14"B — 350A b | 22.15       | 520     | 375     | 35      | 470      | 16      | 26      | 438      | 8       | 11.0    | 7.0     | 4.0 | 17 |
| EN1092 PN16    | 16"B — 400A b | 29.80       | 580     | 414     | 38      | 525      | 16      | 30      | 488      | 8       | 13.0    | 7.0     | 5.0 | 18 |
| EN1092 PN16    | 18"B — 450A b | 38.83       | 640     | 464     | 42      | 585      | 20      | 30      | 538      | 10      | 15.0    | 8.0     | 5.0 | 19 |
| EN1092 PN16    | 20"B — 500A b | 56.48       | 715     | 513     | 46      | 650      | 20      | 33      | 589      | 10      | 15.0    | 8.0     | 5.0 | 19 |

外徑 (D) +1.0MM-0MM

孔徑 (H) ±0.3MM

內徑 (d) +0.5MM-0MM

旋距: ±0.5MM

厚度 (T) +1.0MM-0MM

同心度: ±0.3MM

中心距 (C) ±0.5MM

平行度: ±0.5MM



蚨鑫国际有限公司

FU XIN INTERNATIONAL CO., LIMITED

EN1092 PN16

畫圖

製表

審核

Tyler Zhao

標準

材質

日期

Rubber joint Flange

Carbon Steel: Q235B

04/Sep/2021