


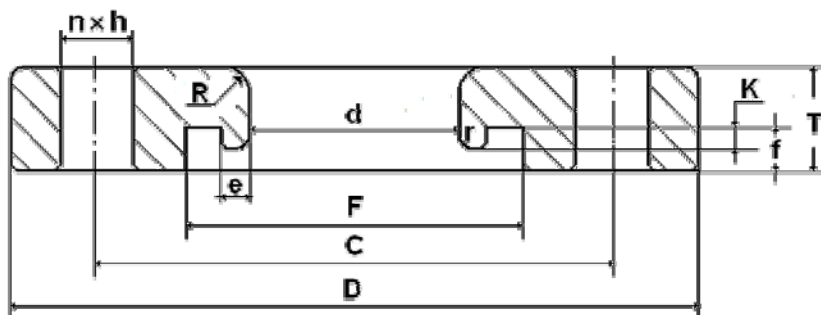

單位:MM

Standard 標準	Size 規格	KG/PC 單重	D 外徑	d 內徑	T 厚度	C 中心距	n 孔數	H 螺紋	F 槽外徑	e 壁厚	f 槽深	K 邊高	r	R
ASA 150 TH	1" — 25A	0.77	108.0	40	14	79.0	4	1/2-13	62	3	5.0	3.0	1.5	10
ASA 150 TH	1.1/4" — 32A	0.82	118.0	52	14	89.0	4	1/2-13	70	3	5.0	3.0	1.5	10
ASA 150 TH	1.1/2" — 40A	1.01	127.0	52	14	98.0	4	1/2-13	70	3	5.0	3.0	1.5	10
ASA 150 TH	2" — 50A	1.64	152.4	63	16	120.7	4	5/8-11	88	3	6.0	3.5	1.5	10
ASA 150 TH	2.1/2" — 65A	2.45	177.8	83	18	139.7	4	5/8-11	107	3	6.0	4.0	1.5	14
ASA 150 TH	3" — 80A	2.71	190.5	92	18	152.4	4	5/8-11	119	3	7.0	4.0	2.0	14
ASA 150 TH	4" — 100A	3.45	228.6	120	18	190.5	8	5/8-11	152	4	8.5	4.5	2.0	15
ASA 150 TH	5" — 125A	4.28	254.0	146	20	215.9	8	3/4-10	183	4	8.5	4.5	2.0	15
ASA 150 TH	6" — 150A	5.28	279.4	171	22	241.3	8	3/4-10	212	4	9.0	5.5	3.0	16
ASA 150 TH	8" — 200A	7.86	342.9	220	22	298.5	8	3/4-10	264	6	9.0	5.5	3.0	16
ASA 150 TH	10" — 250A	10.93	406.4	270	24	362.0	12	7/8-9	324	8	10.0	6.5	4.0	16
ASA 150 TH	12" — 300A	16.26	482.6	322	24	431.8	12	7/8-9	373	8	10.0	6.5	4.0	16

外徑 (D) +1.0MM-0MM

孔徑 (H) ± 0.3 MM

內徑 (d) +0.5MM-0MM

旋距: ± 0.5 MM

厚度 (T) +1.0MM-0MM

同心度: ± 0.3 MM

中心距 (C) ± 0.5 MM

平行度: ± 0.5 MM



蚨鑫国际有限公司

FU XIN INTERNATIONAL CO., LIMITED

ASA 150LB TH

畫圖

製表

審核

Tyler Zhao

標準

材質

日期

Rubber joint Flange

Carbon Steel: Q235B

04/Sep/2021